
Sitzbank Montageanleitung
Sitting Bench Assembly instructions

Gilt für Sitzbank mit und ohne Schuhrost
Applies to Bench with and without shoe rack







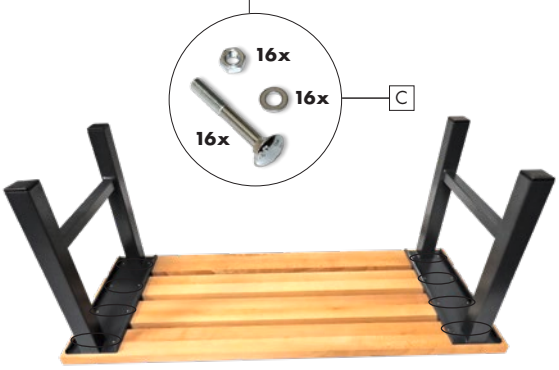

SO FUNKTIONIERT'S:

1. Die Teile vorsichtig aus der Versandverpackung entnehmen und zurechtlegen.
2. Alle 4 Holzbalken [A] mit den rundgeschliffenen Kanten nach unten auf eine ebene möglichst weiche Unterlage (am besten die Verpackungsfläche) legen.
3. Die Fußteile [B] über den vorgebohrten Löchern positionieren und dann nach und nach eine Schraube durch leichtes Anheben des Balkens hindurchschieben und mit der vorgesehenen Unterlegscheibe sowie der Mutter [C] festschrauben.
   Achtung: an dieser Stelle noch nicht zu 100 % festziehen.
4. Wenn alle 16 Schrauben mit den Muttern verbunden sind, die Bank rückengerecht, möglichst mithilfe einer 2. Person herumdrehen und auf den Boden abstellen.
5. **Für das Modell mit Schuhrost**: Den Rost [D] in die Fußteile einhängen. Hierzu die Fußteile vorsichtig nach außen drücken, damit die Schiene des Rostes in die Streben des jeweiligen Fußteils einrastet. Ggf. manuell nachjustieren.
6. Nach Abschluss der Rostmontage die Muttern an den Holzbalken noch einmal festziehen und die Bank am gewünschten Ort platzieren.

HOW IT WORKS:

1. Carefully remove the parts from the shipping packaging and arrange them.
2. Place all 4 wooden beams [A] with the rounded edges facing downwards on a flat, soft surface (preferably the packaging surface).
3. Position the bench feets [B] over the pre-drilled holes and then gradually push a screw through, lifting the wooden beam slightly, and tighten it with the washer and nut [C] provided.
   Caution: do not tighten 100% at this point.
4. When all 16 bolts are connected to the nuts, turn the bench round, as back-friendly and if possible with the help of a second person, and place it on the floor.
5. **For the Model with a shoe rack**: Hook the shoe rack [D] provided into the foot sections. To do this, carefully press the foot sections outwards so that the rail of the rack engages in the struts of the respective foot section. Adjust manually if necessary.
6. Once the grating assembly is complete, tighten the nuts on the wooden beams again. Finally, place the bench in the desired location.





